




Milltown Fire Department

H-16 Insulator Model

The H-16 Insulator Model is an insulated steel overhead sectional door developed to meet the needs of today's heated buildings. This rugged, heavy-duty product has an R-value of 16 and high speed production ensures fast delivery times for new projects or replacement parts. This model is a typical commercial model, however, it may also be used for residential applications. The H-16 Insulator Model is available in a white or brown finish, however, custom colors are also available for an upgrade.


- **Maximum Width of 28'**
- **White or Brown Finish**
- **Foamed in Place Construction - CFC Free**

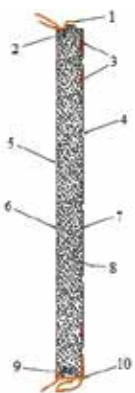

Cross Section

1. Low-temperature top retainer (optional)
2. Thermal break chemically sealed and bonded
3. 20 gauge continuous horizontal steel strip hinge reinforcement
4. Larger pencil rib
5. Slight pencil rib
6. Exterior steel stucco embossed
7. Interior steel stucco embossed
8. Polyurethane core
9. Dual contact weather seal
10. Low-temperature vinyl astragal

Tongue and gasketed groove allows for smooth opening and closing weather tight joints.

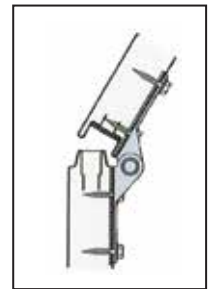

Exterior stucco embossed steel with pencil rib.



Arm-R-Lite Door Manufacturing
40 Colonial Drive
Piscataway, NJ 08854

1.800.554.5816
arm-r-lite.com

Sections:

- Standard sections heights available in 21" or 24" high
- Full view sections available up to 24'-2" wide
- Foamed-in-place construction – CFC free
- 1 ¾" thickness
- Exterior skins 26 gauge hot dipped galvanized steel
- Siliconized polyester white, stucco embossed, wood grain finish
- Built-in reinforcing plates for hardware attachment
- R-value: 16
- End caps – galvanized steel
- Shadow lines add strength and attractive pattern
- White or brown finish - custom colors available for an upgrade
- 5-year warranty on sections against delamination
1-year warranty on all remaining parts (track, springs and hardware)

Rollers:

- Heavy duty ball bearings with hardened inner race

Window Lites:

- 24" x 12", 24" x 8" or full vision sections up to 24'-2" wide
- Extruded aluminum sections of welded construction provide ⅛", ¼", ⅞", or 1" thick insulated glass
- Hurricane glass / welded aluminum full vision sections containing ⅞" thick solid laminated hurricane glass

Track:

Arm-R-Tite galvanized 2" or 3" track

Hardware:

Galvanized stamped steel, 14 gauge



H-16 Model - Newton Fire Department



H-16 Model at local fire station

H16082017V1



Arm-R-Lite Door Manufacturing
40 Colonial Drive
Piscataway, NJ 08854

1.800.554.5816
arm-r-lite.com